


Řada čerpadel ENM

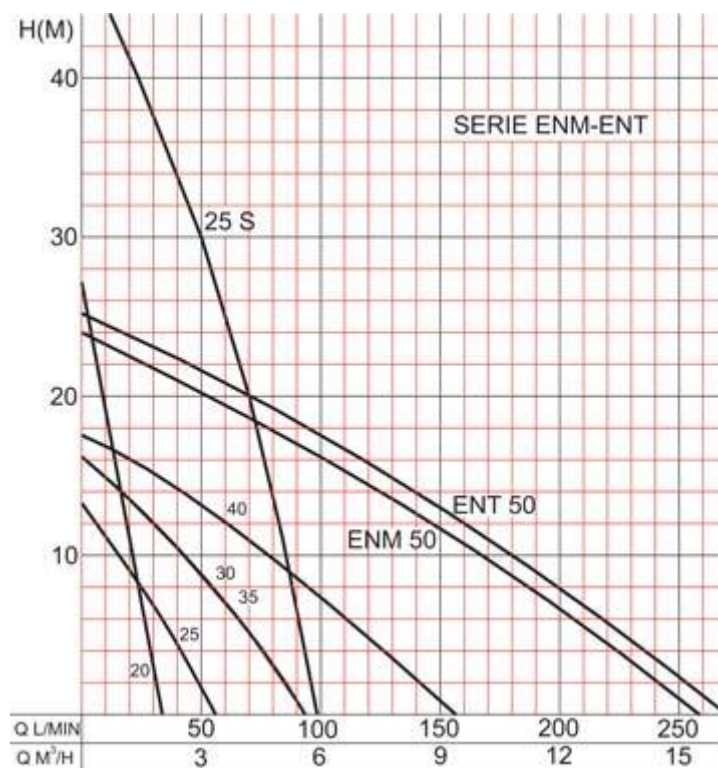

TIPO TYPE		HP	GIRI R.p.m. Tours	Bocche Hoses Orifices	Ř Raccordi Ř Fittings Ř Raccords (mm)	Adescam. Priming Amorçage (m)	Hmax (m)	PORTATA - CAPACITY DEBIT (LT/MIN)					
MONOFASE - 1 PHASE	TRIFASE - 3 PHASE							1 m	5 m	10 m	15 m	20 m	30 m
230 V 50 Hz	400 V 50 Hz												
Art. 500 - ENM 20	Art. 510 - ENT 20	0.5	2800	3/4" M	20	6	27	32	27	21	15	9	
Art. 500 L - ENM 20 L	Art. 510 L - ENT 20 L	0.2	1400	3/4" M	20	6	6	14	4				
Art. 501 - ENM 25	Art. 511 - ENT 25	0.6	1400	1" M	25	6	13	53	38	16			
Art. 501 S - ENM 25 S	Art. 511 S - ENT 25 S	2	2800	1" M	25	6	48	97	92	85	78	70	50
Art. 502 - ENM 30	Art. 512 - ENT 30	1	1400	1 1/2" M	30	6	16	89	71	43	9		
Art. 503 - ENM 35	Art. 513 - ENT 35	1	1400	1 1/2" M	35	6	16	89	71	43	9		
Art. 504 - ENM 40	Art. 514 - ENT 40	1.2	1400	1 1/2" M	40	6	17	149	119	78	32		
Art. 505 - ENM 50		2	1400	2" M	50	6	26	250	215	167	113	53	
	Art. 515 - ENT 50	2.5	1400	2" M	50	6	27	262	227	180	129	71	

Caratteristiche riferite al funzionamento con acqua. Ci riserviamo la facoltà di apportare modifiche senza obbligo di preavviso / Performances referred to operation with water We reserve the right to make modifications without prior notice / Caracteristiques référées au fonctionnement avec eau. Sous réserve de modifications sans avis préalable